

**COUNTY OF SAN MATEO
STATE OF CALIFORNIA**

NOTICE TO CONTRACTORS

NOTICE IS HEREBY GIVEN, that

Sealed bids will be received at the office of the County Manager/Clerk of the Board of Supervisors, Hall of Justice and Records, 400 County Center (formerly 401 Marshall Street), Redwood City, California, until the hour of

2:30 p.m., Thursday, October 1, 2015

which bids will then be transmitted to the County Manager's Office in the Hall of Justice and Records, where the bids will be publicly opened and read aloud for the following project in accordance with the specifications therefor and to which special reference is made as follows:

**THE RECONSTRUCTION OF COUNTY BRIDGE NO. 67
(STATE BRIDGE NO. 35C-043) ON LOWER CRYSTAL SPRINGS DAM IN THE
UNINCORPORATED AREA OF SAN MATEO COUNTY**

**TOTAL PROJECT APPROXIMATELY 626 FEET IN LENGTH
WITH APPURTENANT WORK THERETO
IN SAN MATEO COUNTY**

**COUNTY PROJECT NO. R1103
PROJECT FILE NO. E4867**

FEDERAL-AID PROJECT NO. BRLO-5935 (053)

Bids are required for the entire work described herein.

Bidders are advised that, as required by Federal law, the County of San Mateo has established a DBE goal of 7.94%. The Contractor's attention is directed to the forms included in, and required to be completed and submitted with, the Proposal.

Bidders are further advised of the following:

- 1. Contractor should be placed on a Plan Holders List for bidding. To be placed on the Plan Holders List, the Contractor shall either:**
 - a. Purchase Plans and Specifications, including forms of proposal and contract, from the County of San Mateo Department of Public Works. When purchasing by phone, please send check to 555 County Center, 5th Floor, Redwood City, CA 94063; OR**
 - b. Complete and sign the following Plan Holder's Affidavit and return to the County by fax at (650) 361-8220. The Contractor is advised that the table should be received by the County no later than three (3) working days prior to the bid opening date.**

Plan Holder's Affidavit	
Project Title	The Reconstruction of County Bridge No. 67 (State Bridge No. 35C-043) on Lower Crystal Springs Dam in the Unincorporated Area of San Mateo County.
Project No.	<u> E4867 </u>
Project Engineer:	<u> Carter Choi </u>
Project Manager:	<u> Gil Tourel </u>
Bid Open Date and Time:	<u> 2:30 p.m., Thursday, October 1, 2015 </u>
Company Name:	_____
Mailing Address:	_____
Phone Number:	Fax Number: _____
E-mail Address:	_____
(Name and Title of Authorized Representative of Bidder)	
(Signature of Authorized Representative of Bidder)	

2. **The Plan Holders List will be posted to the County of San Mateo's Public Works website two (2) working days prior to the bid open date.**

3. **It will be the Contractor's sole responsibility to ensure that they have received addendums, *if any*, which will be posted to the County of San Mateo's Public Works website on the same day issued. Said addendums will also be sent to all current plan holders and made available during purchase of Plans and Specifications.**

4. **Reference is made to Section 2-1.10, "Disqualification of Bidders," of the Standard Specifications. The Contractor's attention is directed in particular to the last sentence, which states, "Proposals in which the prices obviously are unbalanced may be rejected."**

5. **The Contractor's attention is directed to the importance of complying with the provisions of Section 7-0.10, "Federal Forms, Posters and Data Required of Contractor During Construction," and Appendix F, "Pre-Construction Handout Packet for Federal-Aid Contracts," of these Special Provisions.**

The Contractor's attention is directed to the IMPORTANT SPECIAL NOTICE located at the end of this Notice To Contractors.

The Public Works website will be updated as needed and can be accessed under the Departments tab found on the County of San Mateo website (<http://publicworks.smcgov.org/>).

IMPORTANT SPECIAL NOTICE

MANDATORY PREBID MEETING

The County will conduct a mandatory prebid meeting for this contract. The purpose of the meeting is to provide small businesses the opportunity to meet and interact with prospective bidders and increase participation in the performance of contracts. The meeting is also intended to give the prospective bidders the chance to familiarize themselves with the area and explore possible site constraints.

Prospective bidders must attend the mandatory prebid meeting. The bidder's representative must be a company officer, project superintendent, or project estimator. For a joint venture, one of the parties must attend the mandatory prebid meeting. The Department will not accept bids from bidders who do not attend the mandatory prebid meeting.

A sign-up sheet will be used to identify all prospective bidders including name and title of the company representative attending the mandatory prebid meeting. Make sure you sign the sign-up sheet for the contract you intend to bid on.

The successful bidder will be required to report small businesses hired to work on this contract as a result of the mandatory prebid meeting.

The meeting will be held on Wednesday August 26, 2015 at 10:00 A.M. at the Vista Point Parking lot just north of Lower Crystal Springs Dam. Due to the nature of this Project, it is mandatory that bidding Contractors attend the prebid site visit and job walk through to become familiar with existing conditions. Contractors are required to bring a hard hat and a safety vest to the mandatory Prebid site visit and job walk through.

ENGINEER'S ESTIMATE

**THE RECONSTRUCTION OF COUNTY BRIDGE NO. 67
(STATE BRIDGE NO. 35C-043) ON LOWER CRYSTAL SPRINGS DAM
IN THE UNINCORPORATED AREA OF SAN MATEO COUNTY**

**TOTAL PROJECT APPROXIMATELY 626 FEET IN LENGTH
WITH APPURTENANT WORK THERETO
IN SAN MATEO COUNTY**

**COUNTY PROJECT NO. R1103
PROJECT FILE NO. E4867**

FEDERAL-AID PROJECT NO. BRLO-5935 (053)

Item No.	Section No.	Estimated Quantity	Unit of Measure	Item Description
1	10	1	LS	CONSTRUCTION WASTE MANAGEMENT
2	11	1	LS	MOBILIZATION
3	11-1	1	LS	WATER POLLUTION CONTROL
4	11-2	1	LS	CONSTRUCTION MANAGEMENT'S FIELD OFFICE
5	12	1	LS	MAINTAINING TRAFFIC
6	12-1	1	EA	TYPE III BARRICADE
7	13-1	1	EA	CRASH CUSHION (ADIEM)
8	13-2	6	EA	REMOVABLE BOLLARD
9	15-1	2	EA	REMOVE INLET
10	15-2	100	LF	REMOVE EXISTING PIPE
11	15-3,4	1	LS	REMOVE MISCELLANEOUS HIGHWAY FACILITIES
12	15-5	9	EA	REMOVE AND REINSTALL ROADSIDE SIGNS
13	15-6	1	Allow	ALLOWANCE FOR PARTIAL REMOVAL OF BRIDGE ABUTMENT
14	15-7	3,350	SY	OBLITERATE (SCARIFY) ROADWAY
15	15-8	1	LS	REMOVE PAVEMENT MARKERS
16	15-9	1	LS	REMOVE TRAFFIC STRIPES AND PAVEMENT MARKINGS
17	15-10	160	LF	REMOVE STONE CURB
18	15-11	4	EA	REMOVE AND RESET EXISTING MILE MARKER
19	15-12	1	EA	RELOCATE EXISTING CHAIN LINK FENCE GATE

Engineer's Estimate – Continued on next page

Reconstruction of County Bridge No. 67, Engineer's Estimate – Continued

Item No.	Section No.	Estimated Quantity	Unit of Measure	Item Description
20	16	1	LS	CLEARING AND GRUBBING
21	16-1	23	EA	REMOVE TREE
22	16-2	65	EA	REMOVE ROADWAY SIGN OR MARKER
23	17	1	LS	DEVELOP AND APPLY WATER
24	19-1	700	CY	ROADWAY EXCAVATION
25	19-2	2,000	CY	STRUCTURE EXCAVATION (ABUTMENTS)
26	19-2	370	CY	STRUCTURE EXCAVATION (RETAINING WALLS)
27	19-3	1,240	CY	STRUCTURE BACKFILL (ABUTMENTS)
28	19-3	475	CY	STRUCTURE BACKFILL (RETAINING WALLS)
29	19-4	1,700	SY	GEOSYNTHETIC REINFORCEMENT
30	19-5	6,200	CY	IMPORTED BORROW
31	19-6	350	CY	IMPORTED TOPSOIL
32	20-2	10,800	SF	ROLLED EROSION CONTROL PRODUCT (TURF REINFORCEMENT MAT)
33	20-3(S)	50	EA	PLANTING TREES
34	20-4(S)	17,800	SF	EROSION CONTROL (HYDROSEED)
35	22	1	LS	FINISHING ROADWAY
36	26	950	CY	AGGREGATE BASE (CLASS 2)
37	39-1 (S-F)	720	TON	ASPHALT CONCRETE (TYPE B, 1/2" MAXIMUM, MEDIUM GRADING)
38	39-2 (S-F)	1,900	SY	PLACE ASPHALT CONCRETE (MISCELLANEOUS AREAS)
39	39-3 (S-F)	16	TON	OPEN-GRADED ASPHALT
40	39-4	90	LF	SAWCUT ASPHALT CONCRETE AND PORTLAND CEMENT CONCRETE
41	50-1 (S-F)	116,000	LBS	PRESTRESSING CONCRETE (STRANDS)
42	50-1	7	CY	MORTAR
43	51 (S-F)	2,240	CY	STRUCTURAL CONCRETE (BRIDGE) SUPERSTRUCTURE
44	51 (S-F)	1,200	CY	STRUCTURAL CONCRETE (BRIDGE) SUBSTRUCTURE
45	51 (S-F)	140	CY	STRUCTURAL CONCRETE (FOOTINGS)

Engineer's Estimate – Continued on next page

Reconstruction of County Bridge No. 67, Engineer's Estimate – Continued

Item No.	Section No.	Estimated Quantity	Unit of Measure	Item Description
46	51 (S-F)	80	CY	STRUCTURAL CONCRETE (APPROACH SLAB)
47	51 (S-F)	210	CY	STRUCTURAL CONCRETE (RETAINING WALLS)
48	51-1 (S-F)	22	CY	CLASS 2 CONCRETE (MINOR STRUCTURES)
49	51-2	7,500	LF	DRILL AND GROUT DOWEL (FOOTINGS)
50	51-4	1,900	SF	GEOCOMPOSITE DRAIN
51	51-6 (S-F)	16	EA	SEISMIC ISOLATION BEARINGS (TYPE A)
52	51-6 (S-F)	12	EA	SEISMIC ISOLATION BEARINGS (TYPE B)
53	51-6 (S-F)	52,200	LBS	STRUCTURAL STEEL (ISOLATION BEARING MOUNTING PLATES)
54	51-6	448	EA	ANCHOR BOLTS (ISOLATION BEARING SUPPORT)
55	51-6	23	SF	NEOPRENE (ABUTMENT SHEAR KEY)
56	51-7 (S)	100	LF	SEISMIC JOINT
57	51-8	13	CY	GEOFOAM (POLYSTYRENE)
58	52-1 (S-F)	608,300	LBS	BAR REINFORCING STEEL (BRIDGE) SUPERSTRUCTURE
59	52-1 (S-F)	203,700	LBS	BAR REINFORCING STEEL (BRIDGE) SUBSTRUCTURE
60	52-1 (S-F)	71,700	LBS	BAR REINFORCING STEEL (FOOTINGS)
61	52-1 (S-F)	18,600	LBS	BAR REINFORCING STEEL (APPROACH SLAB)
62	52-1 (S-F)	29,100	LBS	BAR REINFORCING STEEL (RETAINING WALLS)
63	55-1 (S-F)	40,900	LBS	STRUCTURAL STEEL
64	55-1	312	EA	PG&E CONDUIT SUPPORT BRACKETS (NON-PARTICIPATING)
65	56-1	14	EA	NEW ROADWAY SIGNS
66	56-2	3	EA	NEW SAN MATEO COUNTY PARK SIGNS
67	60	2,300	SF	STONE FACING FINISH
68	64	128	LF	36" DIAMETER HDPE PIPE
69	65	135	LF	18" DIAMETER REINFORCED CONCRETE PIPE
70	67	8	LF	GRATED LINE DRAIN

Engineer's Estimate – Continued on next page

Reconstruction of County Bridge No. 67, Engineer's Estimate – Continued

Item No.	Section No.	Estimated Quantity	Unit of Measure	Item Description
71	68-1	370	LF	UNDERDRAIN PIPE (3" DIAMETER)
72	70	2	EA	STORM DRAIN MANHOLE
73	72	5	CY	ROCK SLOPE PROTECTION
74	72	10	SY	ROCK SLOPE PROTECTION FABRIC
75	73-1	9	EA	MINOR CONCRETE (WHEEL STOP)
76	75(F)	1,300	LB	MISCELLANEOUS IRON AND STEEL
77	75-1(F)	4,350	LB	MISCELLANEOUS METAL (BRIDGE)
78	75-2	270	LF	BRIDGE DECK DRAINAGE SYSTEM
79	80	100	LF	CHAIN LINK FENCE
80	80	1	EA	DRIVEWAY CHAIN LINK GATE
81	80	2	EA	PEDESTRIAN CHAIN LINK GATE
82	83-1	1,200	LF	METAL BEAM GUARD RAILING
83	83-1	2	EA	METAL BEAM GUARD TERMINAL SYSTEM
84	83-1	1	EA	END ANCHOR ASSEMBLY
85	83-2	310	LF	METAL TUBE BRIDGE RAILING
86	83-3	580	LF	METAL GUARDRAIL (STAIRS AND RAMP)
87	83-4	2,300	LF	METAL GUARDRAIL (WALLS)
88	83-5 (S)	626	FT	CONCRETE BARRIER (TYPE 26 MODIFIED)
89	83-5 (S)	1,252	FT	CONCRETE BARRIER (TYPE 25 MODIFIED)
90	84-1	3,350	LF	THERMOPLASTIC TRAFFIC STRIPES – DETAIL 27B
91	84-1	620	LF	THERMOPLASTIC TRAFFIC STRIPES – 3' BROKEN YELLOW
92	84-1	960	LF	THERMOPLASTIC TRAFFIC STRIPES – 4" WHITE STRIPE PARKING
93	84-1	55	LF	THERMOPLASTIC TRAFFIC STRIPES – 4" BLUE HANDICAPPED BORDER
94	84-1	85	SF	THERMOPLASTIC PAVEMENT MARKING - WHITE
95	84-1	15	SF	THERMOPLASTIC PAVEMENT MARKING - BLUE
96	84-2	4	EA	DRAINAGE INLET MARKER

Engineer's Estimate – Continued on next page

Reconstruction of County Bridge No. 67, Engineer's Estimate – Continued

Item No.	Section No.	Estimated Quantity	Unit of Measure	Item Description
97	85	510	EA	PAVEMENT MARKER (TYPE AY)
98	85	105	EA	PAVEMENT MARKER (TYPE D)
99	100 (S)	1	LS	CONSTRUCTION STAKING AND LAYOUT
100	103-1	1	LS	TRENCH SAFETY
101	103-2	370	CY	TRENCHING AND TRENCH BACKFILL
102	104	10	EA	TRIMMING EXISTING TREES AND TREE PROTECTION
103	107	2,500	LF	TEMPORARY FENCE (TYPE ESA)
104	108-4	1	LS	UNDERGROUND ELECTRICAL CONSTRUCTION (SERVICE LINE) (NON-PARTICIPATING)
105	108-5	1	LS	CATWALK (NON-PARTICIPATING)
106	108-6	1	LS	PIEZOMETER EXTENSION (NON-PARTICIPATING)

Engineer's Estimate of Costs: \$12,180,000

(F) Final Pay Quantities - See Section 9-1.015, "Final Pay Items," of the Standard Specifications.

(S) Specialty Items - As defined in Section 8-1.01, "Subcontracting," of the Standard Specifications.

(NON-PARTICIPATING) – Work within the Federal-Aid project limits, but ineligible for Federal funding is referred to as Non-Participating work. The items listed above have been identified and segregated for the purpose of preliminary and detail estimates in association with Federally funded project.

(Note: Gaps in section numbering, above, indicate the Section is blank or does not apply.)

The foregoing quantities are approximate only, being given as a basis for the comparison of bids, and the County of San Mateo does not, expressly or by implication, agree that the actual amount of work will correspond herewith, but reserves the right to increase or decrease the amount of any class or portion of the work, or to omit any portion of the work, as may be deemed necessary or expedient by the Engineer.

Payment to the Contractor for materials furnished and work completed shall be made by the County in accordance with Section 9 of the "Special Provisions" portion of these Contract Documents. Pursuant to Section 22300 of the Public Contract Code, Contractor may, upon his request and at Contractor's expense, substitute equivalent securities for any moneys retained from such payment for the fulfillment of the Contract.

Pursuant to Section 1773 of the Labor Code, prevailing wage rates in the County have been established by the California Department of Industrial Relations, and copies are available in the office of the Director of Public Works. Said prevailing wage rates shall be made available to any interested party on request, and the successful Bidder shall post a copy of the wage rates at the job site.

Pursuant to State Senate Bill SB 854 (Stat. 2014, chapter 28), effective January 1, 2015:

- (1) No contractor or subcontractor may be listed on a bid proposal for a public works project (submitted on or after March 1, 2015) unless registered with the Department of Industrial Relations pursuant to Labor Code section 1725.5 [with limited exceptions from this requirement for bid purposes only under Labor Code section 1771.1(a)].**
- (2) No contractor or subcontractor may be awarded a contract for public work on a public works project (awarded on or after April 1, 2015) unless registered with the Department of Industrial Relations pursuant to Labor Code section 1725.5.**
- (3) This project is subject to compliance monitoring and enforcement by the Department of Industrial Relations.**

Attention is directed to the Federal minimum wage rate requirements in the Contract Documents for this Project. If there is a difference between the minimum wage rates predetermined by the Secretary of Labor and the general prevailing wage rates determined by the Director of the California Department of Industrial Relations for similar classifications of labor, the Contractor and subcontractors shall pay not less than the higher wage rate. The Department will not accept lower State wage rates not specifically included in the Federal minimum wage determinations. This includes "helper" (or other classifications based on hours of experience) or any other classification not appearing in the Federal wage determinations. Where Federal wage determinations do not contain the State wage rate determination otherwise available for use by the Contractor and subcontractors, the Contractor and subcontractors shall pay not less than the Federal minimum wage rate, which most closely approximates the duties of the employees in question.

The U.S. Department of Transportation (DOT) provides a toll-free "hotline" service to report bid rigging activities. Bid rigging activities can be reported Mondays through Fridays, between 8:00 a.m. and 5:00 p.m., Eastern Time, Telephone No. 1-800-424-9071. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the "hotline" to report these activities. The "hotline" is part of the DOT's continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

Wage rates for overtime shall be paid at not less than one and one-half (1-1/2) times the above rates. Wage rates for Sundays and holidays shall be paid at not less than two (2) times the above rates.

The holidays upon which such rates shall be paid shall be all holidays recognized in the collective bargaining agreement applicable to the particular craft, classification, or type of worker employed on the Project.

It is the policy of the County that Contractors on public projects employ their workers and craftsmen from the local labor market whenever possible. "Local Labor Market" is defined as the labor market within the geographical confines of the County of San Mateo, State of California. Consistent with this policy, the Contractor is requested to employ craftsmen and other workers from the local labor market whenever possible to do so.

Each bidder shall submit with the bid, Certificates of Compliance and Intent on a form provided in the "Proposal" Section of these Contract Documents, a certificate that bidder is in

compliance with the provisions of the Equal Employment Opportunity Requirement of Executive Order 11246, Title VII of the Civil Rights Act of 1964, the California Fair Employment and Housing Act and any other federal, State and local laws and regulations relating to equal employment opportunity. With the execution of said certificates, bidder also agrees that bidder will maintain or develop and implement, during the course of the work concerned, a program of hiring and employment, conducted without regard to race, religion, color, national origin, ancestry, sexual orientation, or sex of the applicants. With this certification, bidder shall submit any and all information that may be required by the County in connection with the particular project.

Each bidder is hereby notified of the addition of Article 1.5 (commencing with Section 20104) to Chapter 1 of Part 3 of the Public Contract Code as said Article relates to resolution of construction claims, and to Section 3186 of the Civil Code, as amended January 1, 1999 with regard to stop notices and public entity's rights to retain monies in order to provide for that entity's reasonable cost of litigation. The bidder is further notified that all provisions of Article 1.5 of the Public Contract Code and Section 3186 of the Civil Code, as outlined above shall be considered as incorporated into and become an integral part of these specifications.

Questions relating to equal employment should be directed to the San Mateo County Department of Public Works, Equal Employment Opportunity Program, 555 County Center, 5th Floor, Redwood City, CA 94063-1665, telephone (650) 363-4100.

Plans and Specifications and forms of Proposal and Contract may be seen and obtained at the office of the Director of Public Works, 555 County Center, Redwood City, California, 94063-1665. Plans and specifications may be obtained for a:

NON-REFUNDABLE FEE OF \$100.00 PER SET

Additional technical questions should be directed to the office of the Director of Public Works, 555 County Center, Redwood City, California, 94063-1665, telephone (650) 363-4100.

The Contractor shall possess either a Class A License or a combination of Class C licenses that are applicable for the majority of the work at the time this contract is awarded. No Contract will be awarded to a Bidder who is not licensed as required by laws of the State of California.

The County of San Mateo reserves the right to reject any or all bids and/or waive any informalities or irregularities in any bid received.



Bidders may not withdraw their bid for a period of **FORTY-FIVE (45) DAYS** after the date set from the opening thereof.

BY ORDER OF THE
BOARD OF SUPERVISORS
COUNTY OF SAN MATEO

DATE: April 29, 2015

**John L. Maltbie, County Manager/
Clerk of the Board of Supervisors**

PUBLIC ENTRANCE
(SECURITY CHECK POINT)

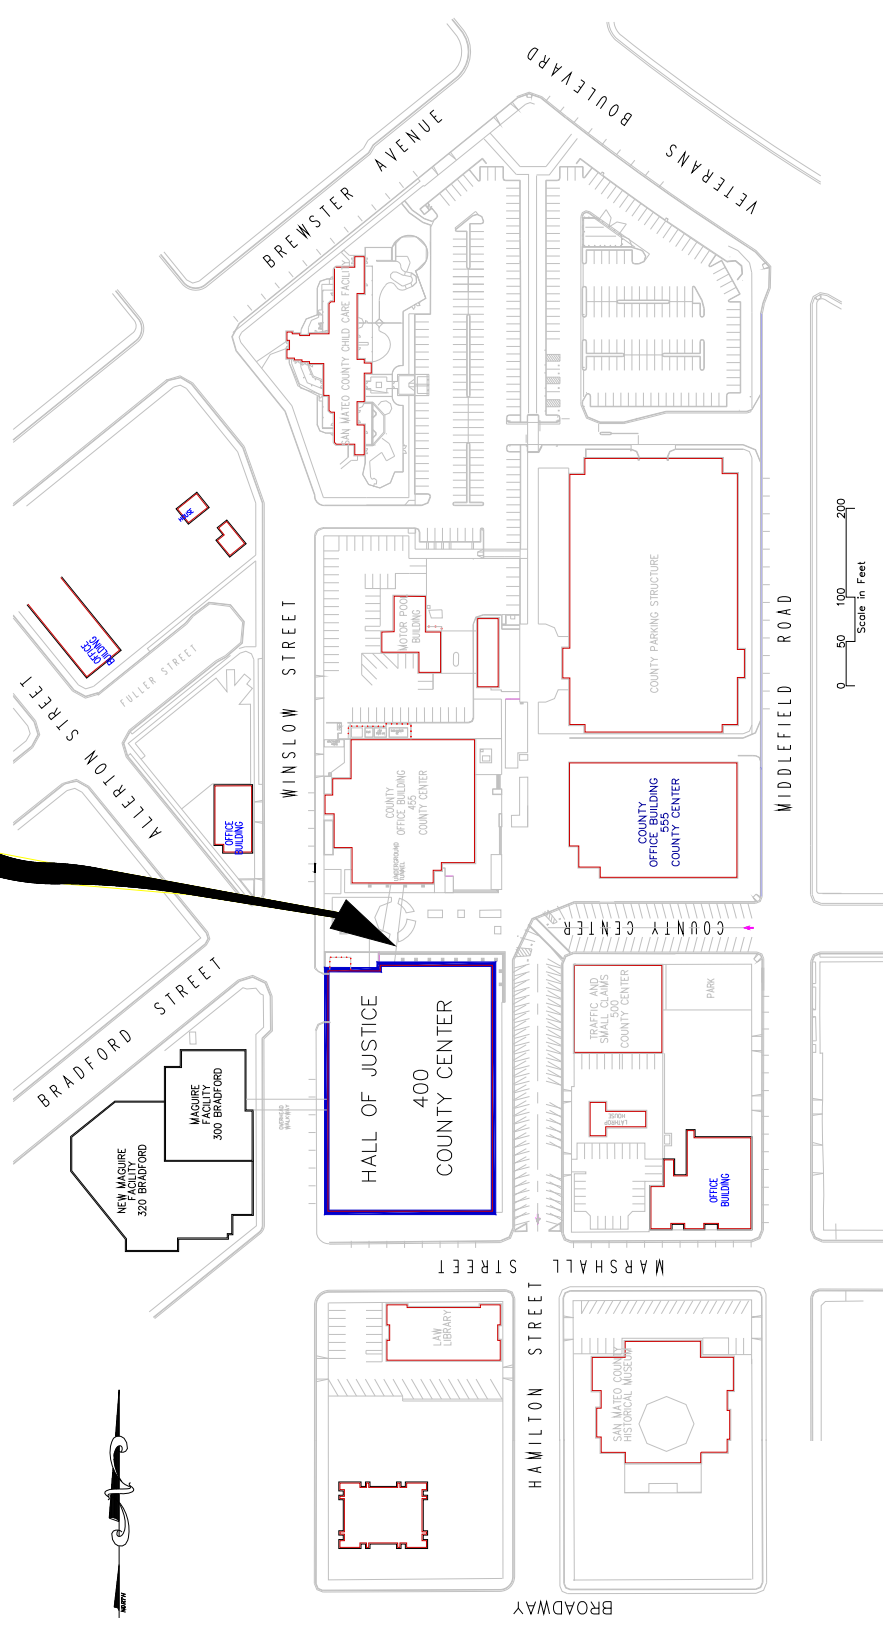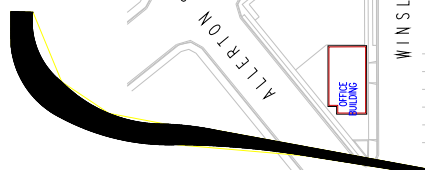

SAN MATEO COUNTY GOVERNMENT CENTER

NOTE:

Receipt of Bids in the Office of the County Manager/Clerk of the Board of Supervisors, Hall of Justice.
Refer to project Notice to Contractors for Time, Date or alternate location.

F:\USERS\DESIGN\SPEC\BOILERPLATES\555_BIDOPEN3.DWG